

Направленная антенна AC308R3



Диапазон 26.5 - 40 ГГц

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

R&S®AC308R3 SHF/EHF DIRECTIONAL ANTENNA

26.5 GHz to 40 GHz

Broadband directional antenna for radiomonitoring



The R&S®AC308R3 SHF/EHF directional antenna for the frequency range from 26.5 GHz to 40 GHz has a reflector diameter of 25 cm.


The antenna is supplied with an integrated preamplifier (model .02) or without a preamplifier (model .04).

The R&S®AC308R3 with optional tripod, adapter and power supply can be operated independently.

Key facts

- ▶ Wide frequency range
- ▶ Fast and simple installation
- ▶ Rugged design



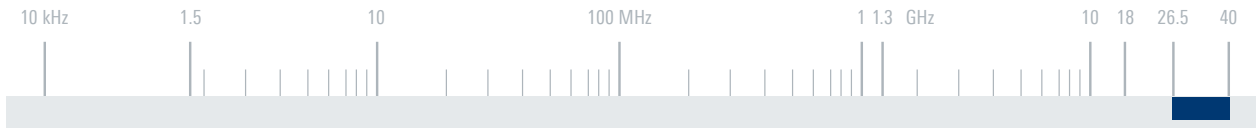

Specifications


Antenna

Frequency range	26.5 GHz to 40 GHz
Polarization	H, V or 45°, depending on installation
Input impedance	50 Ω
VSWR	< 3
Gain	33 dBi to 36 dBi
Half-power beamwidth	3° to 2°
Reflector diameter	250 mm
Connector	K female


Preamplifier (typical values)

Gain	> 30 dB
1 dB compression point	≥ +10 dBm
Noise figure	< 4 dB
Power consumption	+15 V/0.2 A
MTBF	model .04 (passive) > 250000 h model .02 (active) > 100000 h
Operating temperature range	-20°C to +50°C
Dimensions	L × Ø approx. 380 mm × 300 mm (15 in × 12 in)
Weight	approx. 4 kg (9 lb)

Typical antenna gain

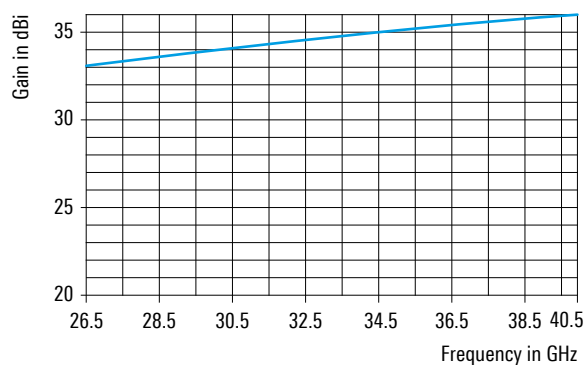

Typical radiation pattern at 40 GHz

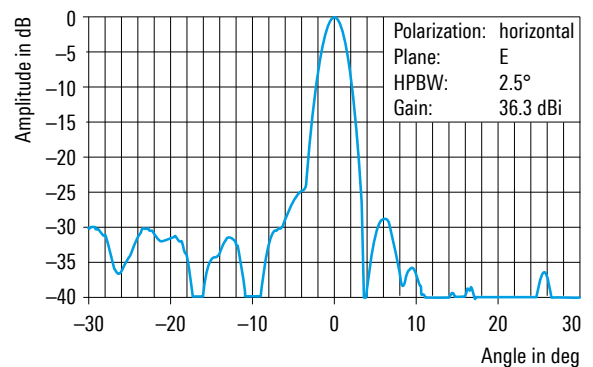

Ordering information	Type	Order No.
SHF/EHF directional antenna	R&S®AC308R3	
With preamplifier, 26.5 GHz to 40 GHz		4051.6253.02
Without preamplifier, 26.5 GHz to 40 GHz		4051.6253.04
Recommended extras		
Power supply	R&S®IN308	4059.6752.02
Transit case	R&S®AC308Z	4059.6500.02
Adapter for R&S®HZ-1	R&S®KA308R2	4057.8606.00
Wooden tripod	R&S®HZ-1	0837.2310.02



Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93