

Направленная антенна HE200



Диапазон 20 МГц - 3 ГГц

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

<https://rohdeschwarz.nt-rt.ru> || rwz@nt-rt.ru

VHF/UHF Antennas

Active Directional Antenna

R&S® HE 200



20 MHz to 3000 MHz

Portable directional antenna for tracing signal transmitters and interference sources

Features


- ◆ Distinct directional pattern
- ◆ Suitable for horizontal and vertical polarization
- ◆ Wide frequency range
- ◆ Wide dynamic range
- ◆ Handy size
- ◆ Low weight

Brief description

Due to its small size and low weight, the Active Directional Antenna R&S® HE 200 is ideal for portable use.


In conjunction with portable receivers, it allows signal transmitters and interference sources to be reliably detected and localized. The direction is found by orienting the antenna towards the maximum signal level.

The wide frequency range is covered by three frequency-band-optimized antenna modules. The linearly polarized directional antennas have cardioid radiation patterns so that a constant DF accuracy is attained over the entire frequency range.




Specifications

Frequency range	20 MHz to 3 GHz	Connector	N male
RF module 1	20 MHz to 200 MHz	MTBF	>50 000 h
RF module 2	200 MHz to 500 MHz	Operating	
RF module 3	500 MHz to 3 GHz	temperature range	-30 °C to +60 °C
Optional HF module		Transit case (L × W × H)	approx. 562 mm × 430 mm × 190 mm
R&S®HE200HF	10 kHz to 20 MHz	Length of	
Input impedance	50 Ω	connecting cable	approx. 1 m
VSWR	typ. <2.5	Weight	
Power supply	4 × 1.5 V DC, size: AA	Antenna	approx. 1 kg (max.)
Power consumption	approx. 55 mA at +25 °C	With transit case	approx. 5 kg

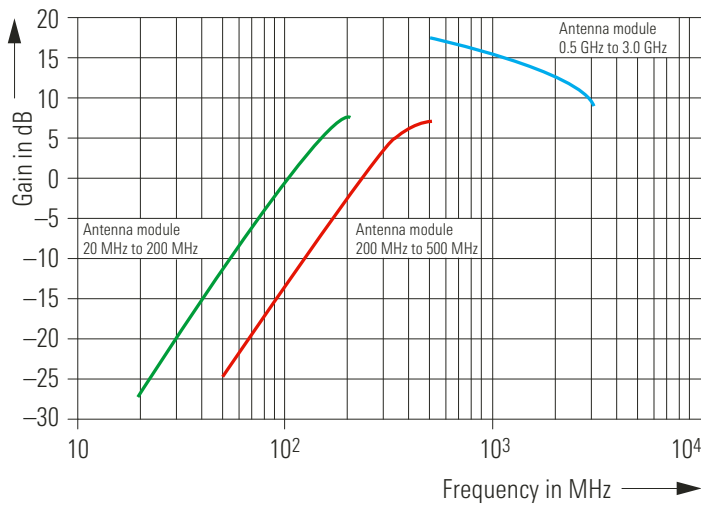

Typical practical gain in active mode

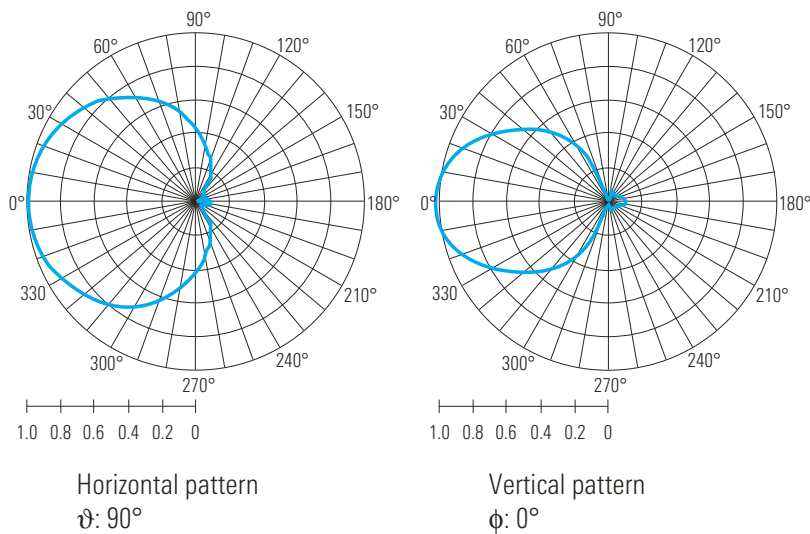

Typical directional radiation pattern in the frequency range 0.5 GHz to 3 GHz

Ordering information

Active			Recommended extras		
Directional Antenna	R&S® HE 200	4050.3509.02	Loop Antenna	R&S® HE 200HF	4051.4009.02



Архангельск (8182)63-90-72
 Астана (7172)727-132
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06

Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93