


Осциллограф RTM1000

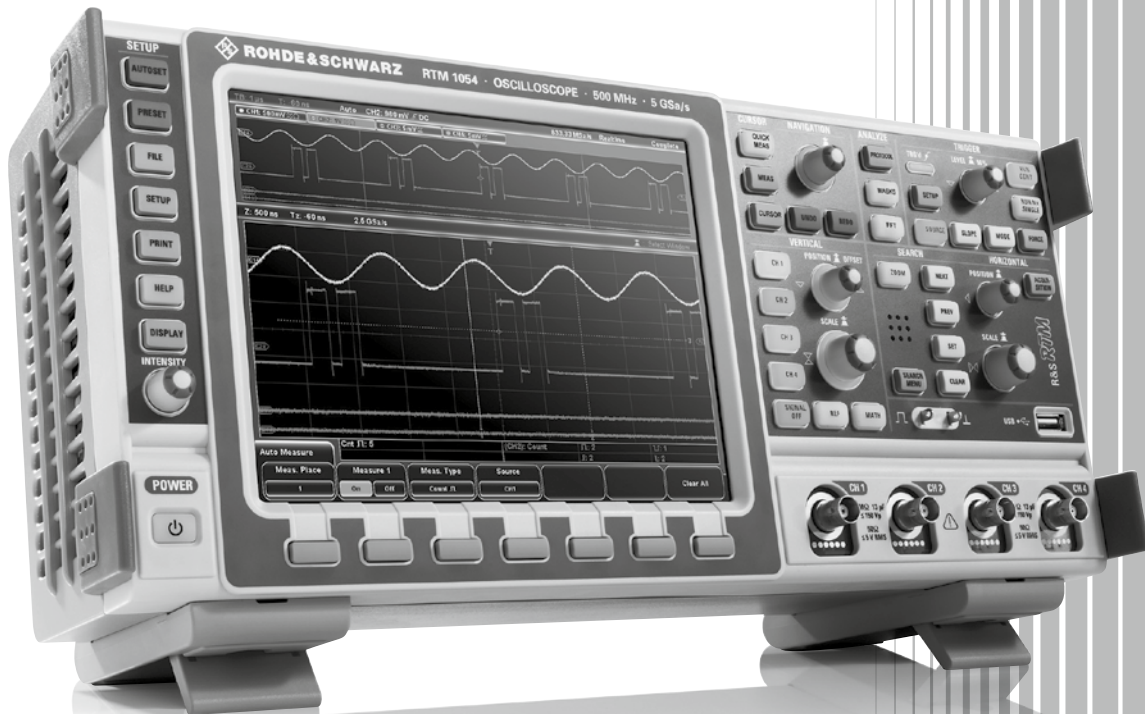

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

CONTENTS

Definitions	3
Base unit.....	4
Vertical system.....	4
Horizontal system	4
Acquisition system	5
Trigger system	5
Waveform measurements.....	6
Mask testing.....	7
Waveform maths.....	7
Search function	8
Display characteristics	8
Miscellaneous	8
Input and outputs	9
General data	10
Options	11
R&S®RTM-B10.....	11
R&S®RTM-K1 (only available for the R&S®RTM1054)	11
R&S®RTM-K2 (only available for the R&S®RTM1054)	12
R&S®RTM-K3 (only available for the R&S®RTM1054)	12
Ordering information	14

Definitions


General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

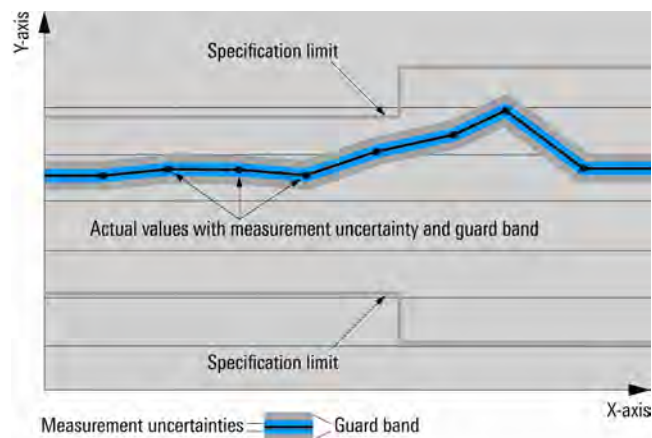

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

Base unit

Vertical system

Input channels	R&S®RTM1052	2 channels
	R&S®RTM1054	4 channels
Input impedance		50 Ω ± 1.5 % or 1 MΩ ± 1 % with 13 pF ± 1 pF (meas.)
Bandwidth (–3 dB) at 50 Ω input impedance		> 500 MHz
Bandwidth (–3 dB) at 1 MΩ input impedance		500 MHz (meas.)
Lower frequency limit (–3 dB) at AC coupling		< 5 Hz (meas.)
Analog bandwidth limits (max. –2 dB, min. –3.5 dB)		400 MHz, 200 MHz, 20 MHz
Rise time (calculated)		700 ps
Vertical resolution		8 bit
DC gain accuracy	offset and position = 0 maximum operating temperature change of ±5 °C after self-alignment	
	input sensitivity > 5 mV/div	±1.5 %
	input sensitivity ≤ 5 mV/div	±2 %
Input coupling		DC, AC
Input sensitivity	at 50 Ω	1 mV/div to 1 V/div
	at 1 MΩ	1 mV/div to 10 V/div
Maximum input voltage	at 50 Ω	5 V (RMS), max. 30 V (V _p)
	at 1 MΩ	150 V (RMS), 200 V (V _p), derates at 20 dB/decade to 5 V (RMS) above 250 kHz
Position range		±5 div
Offset range	input sensitivity	
	500 mV/div to ≤ 10 V/div	±(100 V – input sensitivity × 5 div) max. ±5 V at 50 Ω
	50 mV/div to < 498 mV/div	±(10 V – input sensitivity × 5 div) max. ±5 V at 50 Ω
	1 mV/div to < 49.8 mV/div	±(1 V – input sensitivity × 5 div)
Offset accuracy		±(0.5% × net offset + + 0.15 div × input sensitivity) (net offset = offset – (position × input sensitivity))
DC measurement accuracy	after adequate suppression of measurement noise by using either high-resolution sampling mode or waveform averaging, or a combination of both	±(DC gain accuracy × reading – net offset + offset accuracy)
Channel-to-channel isolation (each channel at same input sensitivity)	input frequency < 500 MHz	> 50 dB

Horizontal system

Timebase range		selectable between 1 ns/div and 50 s/div
Channel deskew		±100 ns
Trigger offset range	min.	memory depth/actual sampling rate
	max.	4 × memory depth/actual sampling rate
Modes		normal, roll
Channel-to-channel skew		< 200 ps (meas.)
Timebase accuracy		±10 ppm

Acquisition system

Maximum realtime sampling rate	R&S®RTM1052	2 channels with 2.5 Gsample/s 1 channel with 5 Gsample/s
	R&S®RTM1054	4 channels with 2.5 Gsample/s 2 channels with 5 Gsample/s
Maximum equivalent time sampling rate		100 Gsample/s
Memory depth per channel	at sampling rate of 2.5 Gsample/s	4 Msample for each channel
	at sampling rate of 5 Gsample/s	8 Msample for each channel
Decimation modes	sample	first sample in decimation interval
	peak detect	largest and smallest sample in decimation interval
	high resolution	average of up to 8 samples close to the decimation point
Waveform arithmetic	off	no arithmetic
	envelope	envelope of acquired waveforms
	smooth	graphical smoothing of acquired waveform
	average	average over a series of acquired waveforms
	filter	digital lowpass on the acquired waveform, limit frequency selectable
Number of averaged waveforms		2, 4, 8, 16, 32, 64, 128, 256, 512, 1024
Waveform acquisition rate		up to 12500 waveforms/s

Trigger system

Trigger level	range	±10 div from center of screen
Trigger modes		auto, normal, single, n single
Trigger types		edge, width, video, pattern, serial bus
Edge trigger	trigger events	rising edge, falling edge, both edges
	sources for A trigger	
	R&S®RTM1052	channel 1, channel 2, ext. trigger input, line
	R&S®RTM1054	channel 1, channel 2, channel 3, channel 4, ext. trigger input, line
	trigger coupling of A trigger	DC, AC, HF reject (attenuates > 5 kHz (meas.)), LF reject (attenuates < 2 kHz (meas.)), lowpass (attenuates > 100 MHz (meas.))
	sources for B trigger	
	R&S®RTM1052	channel 1, channel 2
	R&S®RTM1054	channel 1, channel 2, channel 3, channel 4
	trigger coupling of B trigger	DC
	selectable trigger hysteresis for A and B trigger	automatic, small, medium, large
Width trigger	trigger events	pulse width is smaller, greater, equal, unequal, inside interval, outside interval
	minimum pulse width	20 ns
	maximum pulse width	100 ms
	polarity	positive, negative
	sources	
	R&S®RTM1052	channel 1, channel 2, ext. trigger input
	R&S®RTM1054	channel 1, channel 2, channel 3, channel 4, ext. trigger input
	selectable trigger hysteresis	automatic, small, medium, large
Video trigger	trigger events	selectable line, all lines, even frame, odd frame, all frames
	supported standards	PAL, NTSC, SECAM, PAL-M, SDTV 576i, HDTV 720p, HDTV 1080i, HDTV 1080p
	sources	
	R&S®RTM1052	channel 1, channel 2, ext. trigger input
	R&S®RTM1054	channel 1, channel 2, channel 3, channel 4, ext. trigger input
	sync pulse polarity	positive, negative

Pattern trigger	trigger events sources	logic condition between active channels
	R&S®RTM1052	channel 1, channel 2
	R&S®RTM1054	channel 1, channel 2, channel 3, channel 4
	state of channels	high, low, don't care
	logic between channels	and/or
	condition	true, false
Serial bus trigger	supported standards	
	R&S®RTM-K1 option (only available for the R&S®RTM1054)	I ² C/SPI (two- and three-wire)
	R&S®RTM-K2 option (only available for the R&S®RTM1054)	UART/RS-232
	R&S®RTM-K3 option (only available for the R&S®RTM1054)	CAN/LIN
Trigger sensitivity	with DC, AC, LF reject, lowpass	
	input sensitivity > 5 mV/div	< 0.8 div
	2 mV/div ≤ input sensitivity < 5 mV/div	< 1.5 div (meas.)
	input sensitivity < 2 mV/div	< 2 div (meas.)
	with HF reject	
	all input sensitivities	< 1 div (meas.)
External trigger input	input impedance	1 MΩ ± 1 % with 12 pF ± 2 pF (meas.)
	maximum input voltage	150 V (V _p) derates at 20 dB/decade to 5 V (RMS) above 250 kHz
	trigger level	±5 V
	sensitivity	< 300 mV (V _{pp})
	input coupling	DC, AC

Waveform measurements

Automatic measurements	measurements on channels, math waveforms, reference waveforms	mean, mean cycle, RMS, RMS cycle, amplitude, top level, base level, peak-to-peak, max. peak, min. peak, period, frequency, positive pulse count, negative pulse count, rising edge count, falling edge count, positive pulse width, negative pulse width, positive duty cycle, negative duty cycle, rise time, fall time, standard deviation, standard deviation cycle, delay, phase, burst width
	measurements on trigger signal	trigger period, trigger frequency implemented by means of six-digit hardware counter
		DC voltmeter (requires active probe with R&S®ProbeMeter functionality)
	reference levels	lower, middle and upper level in percentage
	statistics	maximum, minimum, mean, standard deviation and measurement count for each automatic measurement
	number of active measurements	4
Cursor measurements	measurements on channels, math waveforms, reference waveforms	voltage, time, voltage and time, ratio x, ratio y, pulse count, peak values, RMS/mean/standard deviation, duty ratio, burst width, rise/fall time, vertical marker
	additional actions for cursor	timebase tracking, coupling of cursors, autoset, set to screen

Quick measurements	function	fast overview of measurements from one channel some measurements displayed with result lines in diagram
	sources	
	R&S®RTM1052	channel 1, channel 2
	R&S®RTM1054	channel 1, channel 2, channel 3, channel 4
	measurements displayed in diagram	mean, max. peak, min. peak, rise time, fall time
	numerically displayed measurements	RMS, peak-to-peak, period, frequency

Mask testing

Sources	R&S®RTM1052	channel 1, channel 2
	R&S®RTM1054	channel 1, channel 2, channel 3, channel 4
Mask definition		acquired waveform with user-defined tolerance, can be stored and restored
Result statistics		completed acquisitions, passed and failed acquisitions (absolute and in percent), test duration
Actions on mask violation		beep, acquisition stop, print, screenshot

Waveform maths

Number of math waveforms		up to 5
Functions		addition, subtraction, multiplication, division, maximum, minimum, square, square root, absolute value, positive wave, negative wave, reciprocal, inverse, log10, ln, derivation, integration, lowpass filter, highpass filter
Sources	R&S®RTM1052	channel 1, channel 2, math waveforms 1 to 4
	R&S®RTM1054	channel 1, channel 2, channel 3, channel 4, math waveforms 1 to 4
Spectral analysis	sources	channel 1, channel 2 (R&S®RTM1052) channel 1, channel 2, channel 3, channel 4 (R&S®RTM1052)
	setup parameters	center frequency, frequency span, vertical scale, vertical position
	FFT lengths	2048, 4096, 8192, 16384, 32768, 65536
	windows	Hann, Hamming, Blackman, rectangular
	waveform arithmetic	none, envelope, average (selectable 2, 4, 8, 16, 32, 64, 128, 256, 512)
	cursors	two horizontal cursors, previous peak, next peak, timebase tracking, coupling of cursors, set to screen

Search function

Functions	search types	edge, width, peak, rise/fall time, runt, data2clock, pattern, protocol (available with R&S®RTM-K3 option)
	configuration	manual level setting on screen, level with selectable hysteresis
	gate	all recorded data (only in stop mode), displayed data or selectable time frame with start and stop time
	display of search events	in diagram and in result table
	markers on search events	up to 20 markers
	navigation in search events (stop modus)	fast navigation with keys (marked events) or knob (if result table is active)
Sources	R&S®RTM1052	channel 1, channel 2, math waveforms 1 to 4
	R&S®RTM1054	channel 1, channel 2, channel 3, channel 4, math waveforms 1 to 4

Display characteristics

Diagram types		Yt, XY, XYZ, zoom, FFT
XY/XYZ mode		parallel display of XY/XYZ diagram and Yt diagrams of input signals for X, Y ₁ , Y ₂ and Z
Zoom		horizontal zoom with fast navigation, split screen with overview signal and zoomed signal
Interpolation		sin(x)/x, linear, sample&hold
FFT mode		split screen with overview signal and dedicated frequency display
Waveform display		lines, dots
Persistence		50 ms to 9.6 s; infinite
Special display mode		inverse brightness, temperature colors
Diagram grid		lines, reticle, none
Marker		up to 16 time markers, fast navigation with dedicated keys
Reference signals		up to 4 reference signals

Miscellaneous

Save/recall	device settings	save and recall on internal file system or USB memory stick
	reference waveforms	save and recall on internal file system or USB memory stick
	math equation sets	save and recall on internal file system or USB memory stick
	waveforms	save on USB memory stick, available file formats: BIN, CSV, TXT, TRF
	screenshots	save on USB memory stick, available file formats: BMP, PNG
Print		configurable print button, actions on press: <ul style="list-style-type: none"> • save device settings • save traces • save screenshot • save screenshot and device settings • print screenshot on USB printer
Instrument security		secure erasure of internal file system and all settings

Menu languages		available menu languages: <ul style="list-style-type: none"> • English • German • French • Russian • Simplified Chinese • Traditional Chinese • Japanese
Help		online help, available languages: <ul style="list-style-type: none"> • English
Undo/Redo		deep Undo/Redo function

Input and outputs

Front		
Channel inputs		BNC, for details see "Vertical system"
	probe interface	auto detection of passive probes, active probe interface
Probe compensation output	signal shape	rectangle $V_{low} = 0\text{ V}$, $V_{high} = 1\text{ V}$ (meas.)
	frequency	1 kHz/1 MHz depending on timebase setting
Ground jack		connected to ground
USB host interface		1 port, type A plug, version 2.0, memory sticks only
Rear		
Ext. trigger input		BNC, for details see "Trigger system"
USB host interface		1 port, type A plug, version 2.0, printer
Interface slot	slot for interface boards	LAN/USB interface (standard) GPIB interface
	LAN/USB interface	
	LAN	RJ-45 connector, supports 10/100BaseT
	USB	USB device port
	GPIB interface	see R&S® RTM-B10 option
External monitor interface		DVI-D connector, output of scope display
Security slot		for standard Kensington style lock

General data

Display		
Type		8.4" LC TFT color display
Resolution		1024 × 768 pixel (XGA)

Temperature		
Temperature loading	operating temperature range	0 °C to +50 °C
	storage temperature range	−40 °C to +70 °C
Climatic loading		+40 °C at 85 % rel. humidity, in line with IEC 60068-2-30

Altitude		
Operating		up to 3000 m above sea level
Non-operating		up to 4600 m above sea level

Mechanical resistance		
Vibration	sinusoidal	5 Hz to 150 Hz, max. 2 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz; in line with EN 60068-2-6
	random	10 Hz to 300 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E, method no. 516.4, procedure I

EMC		
RF emission	in line with EN 55011 class A, operation in residential, commercial and business areas or in small-size companies is not covered; therefore the instrument may not be operated in residential, commercial and business areas or in small-size companies unless additional measures are taken to ensure that EN 55011 class B is complied with	in line with CISPR 11/EN 55011 group 1 class A (for a shielded test setup) The instrument complies with the emission requirements stipulated by EN 55011, EN 61326-1 and EN 61326-2-1 class A. This means that the instrument is suitable for use in industrial environments.
Immunity		in line with IEC/EN 61326-1 table 2, immunity test requirements for industrial environments ¹

Certifications		
		VDE-GS, cCSA _{US}

Calibration interval		
		1 year

Power supply		
AC supply		100 V to 240 V at 50 Hz to 60 Hz max. 120 VA, in line with MIL-PRF-28800F
Power consumption		max. 100 W
Safety		in line with IEC 61010-1, EN 61010-1, CAN/CSA-C22.2 No. 61010-1-04, UL 61010-1

Mechanical data		
Dimensions	W × H × D	403 mm × 189 mm × 142 mm (15.87 in × 7.44 in × 5.59 in)
Weight	without options (nom.)	4.9 kg (10.8 lb)

¹ Test criterion is displayed noise level within ±1 div for input sensitivity of 49.8 mV/div.

Options

R&S® RTM-B10

GPIB additional interface		
Function		interface in line with IEC 625-2 (IEEE 488.2)
Command set		SCPI 1999.0
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL0, PP1, DC1, DT0, C0

R&S® RTM-K1 (only available for the R&S® RTM1054)

I ² C/SPI triggering and decoding		
I ² C		
Bus configuration	sources for SCL and SDA	channel 1, channel 2, channel 3, channel 4
	bit rate	up to 10 Mbps
	size of address	7 bit or 10 bit
	size of data	8 bit
	label list	associate frame identifier with symbolic ID
Trigger	trigger events	start, stop, restart, missing acknowledge, address (7 bit or 10 bit), data, address and data
	offset for trigger on data	0 data byte to 4095 data byte
	data pattern width	up to 3 sequential data byte
Decode	displayed signals	bus signal, logic signal or both
	color coding of bus signal	address, data, start, stop, ACK, NACK; error and trigger event are displayed in different colors
	displayed format of address	hex
	displayed format of data	ASCII, binary, decimal or hex
SPI		
Bus configuration	sources for CS, CLK, MOSI and MISO	channel 1, channel 2, channel 3, channel 4
	bit rate	up to 25 Mbps
	chip select (CS)	active low, active high or missing (two-wire SPI)
	clock (CLK) slope	rise or fall
	data symbol size	1 bit to 32 bit
	idle time for two-wire SPI	< 1 ms
Trigger	trigger events	start of frame, end of frame, bit number, data pattern
	selectable bit number	0 to 4095
	offset for trigger on data pattern	0 bit to 4095 bit
	data pattern size	1 bit to 32 bit
Decode	displayed signals	bus signal, logic signal or both
	color coding of bus signal	data, start, stop; error and trigger event are displayed in different colors
	displayed format of data	ASCII, binary, decimal or hex
	data decoding	MSB or LSB first

R&S® RTM-K2 (only available for the R&S® RTM1054)

UART/RS-232 triggering and decoding		
Bus configuration	source for RX and TX	channel 1, channel 2, channel 3, channel 4
	bit rate	300/600/1200/2400/4800/9600/19200/38400/57600/115200 bps or user-selectable up to 12 Mbps
	end of frame	timeout, none
	signal polarity	idle low, idle high
	data symbol size	5 bit to 9 bit
	parity	none, even or odd
	stop bits	1, 1.5 or 2
Trigger	trigger events	start bit, start of frame, symbol number, any symbol, pattern of symbols, parity error, frame error, break
	offset for trigger on data symbol	0 to 4095 symbols
	data symbol pattern width	1 to floor (32/symbol size) symbols
Decode	displayed signals	bus signal, logic signal or both
	color coding of bus signal	data, start, stop; error and trigger event are displayed in different colors
	displayed format of data	ASCII, binary, decimal or hex

R&S® RTM-K3 (only available for the R&S® RTM1054)

CAN triggering and decoding		
Bus configuration	signal type	CAN_H, CAN_L
	bit rate	10/20/33.3/50/83.3/100/125/250/500/1000 kbps or user-selectable in range from 100 bps to 5 Mbps
	sampling point	10 % to 90 % within bit period
	label list	associate frame identifier with symbolic ID
Trigger	trigger events	start of frame, frame type, identifier, identifier + data, error condition (any combination of CRC error, bit stuffing error, form error and ACK error)
	identifier setup	frame type (data, remote or both), identifier type (11 bit or 29 bit); condition =, ≠, >, <; identifier selectable from label list
	data setup	data pattern up to 8 byte (hex or binary); condition =, ≠, >, <
Decode	displayed signals	bus signal, logic signal or both
	color coding of bus signal	start of frame, identifier, DLC, data payload, CRC, ACK, end of frame, error frame, overload frame, CRC error, bit stuffing error, ACK error
	displayed format of data	hex, decimal, binary, ASCII
	frame table	decode results displayed as tabulated list, errors highlighted in red; three table positions (top, bottom, full screen); frame navigation; data export as CSV file
Search	search events	frame, error, identifier, identifier + data, identifier + error
	frame event setup	start of frame, end of frame, overload frame, error frame, data ID 11 bit, data ID 29 bit, remote ID 11 bit, remote ID 29 bit
	error event setup	any combination of CRC error, bit stuffing error, form error and ACK error
	identifier setup	frame type (data, remote or both), identifier type (11 bit or 29 bit); condition =, ≠, >, <; identifier selectable from label list
	data setup	data pattern up to 8 byte (hex or binary); condition =, ≠, >, <
	event table	search results displayed as tabulated list; event navigation

LIN triggering and decoding		
Bus configuration	version	1.3, 2.x or SAE J602; mixed traffic is supported
	bit rate	1.2/2.4/4.8/9.6/10.417/19.2 kbps or user-selectable in range from 1 kbps to 5 Mbps
	polarity	active high or active low
	label list	associate frame identifier with symbolic ID
Trigger	source	any input channel
	trigger events	start of frame (sync break), identifier, identifier + data, wakeup frame, error condition (any combination of checksum error, parity error and sync field error)
	identifier setup	range from 0d to 63d; condition =, ≠, >, <; identifier selectable from label list
	data setup	data pattern up to 8 byte (hex or binary); condition =, ≠, >, <
Decode	displayed signals	bus signal, logic signal or both
	color coding of bus signal	frame, frame identifier, parity, data payload, checksum, error condition
	displayed format of data frame table	hex, decimal, binary, ASCII decode results displayed as tabulated list, errors highlighted in red; three table positions (top, bottom, full screen); frame navigation; data export as CSV file
Search	search events	frame, error, identifier, identifier + data, identifier + error
	frame event setup	start of frame, wake up
	error event setup	any combination of checksum error, parity error and sync field error
	identifier setup	range from 0d to 63d; condition =, ≠, >, <; identifier selectable from label list
	data setup	data pattern up to 8 byte (hex or binary); condition =, ≠, >, <
	event table	search results displayed as tabulated list; event navigation



Ordering information

Designation	Type	Order No.
Base unit (including standard accessories: per channel: 500 MHz passive probe (10:1), compact manual, CD-ROM (with operating and service manual), power cord)		
Digital Oscilloscope		
500 MHz, 2.5/5 Gsample/s, 4/8 Msample, 2 channels	R&S®RTM1052	1305.0008.52
500 MHz, 2.5/5 Gsample/s, 4/8 Msample, 4 channels	R&S®RTM1054	1305.0008.54
Hardware options		
GPIO Interface	R&S®RTM-B10	1305.0014.02
Software options		
I ² C/SPI Serial Triggering and Decoding (only for R&S®RTM1054)	R&S®RTM-K1	1305.0295.02
UART/RS-232 Serial Triggering and Decoding (only for R&S®RTM1054)	R&S®RTM-K2	1305.0308.02
CAN/LIN Serial Triggering and Decoding (only for R&S®RTM1054)	R&S®RTM-K3	1317.3065.02
Probes		
500 MHz, passive, 10:1, 10 MΩ, 9.5 pF, max. 400 V	R&S®RTM-ZP10	1409.7708.02
400 MHz, passive, high-voltage, 100:1, 50 MΩ, 7.5 pF, 1 kV (RMS)	R&S®RT-ZH10	1409.7720.02
400 MHz, passive, high-voltage, 1000:1, 50 MΩ, 7.5 pF, 1 kV (RMS)	R&S®RT-ZH11	1409.7737.02
1.0 GHz, active, 1 MΩ, 0.8 pF, R&S®ProbeMeter, micro button	R&S®RT-ZS10	1410.4080.02
1.0 GHz, active, 1 MΩ, 0.8 pF	R&S®RT-ZS10E	1418.7007.02
1.5 GHz, active, differential, 1 MΩ, 0.6 pF, R&S®ProbeMeter, micro button	R&S®RT-ZD20	1410.4409.02
10 MHz, current, AC/DC, 0.01 V/A, 150 A (RMS)	R&S®RT-ZC10	1409.7750.02
100 MHz, current, AC/DC, 0.1 V/A, 30 A (RMS)	R&S®RT-ZC20	1409.7766.02
Probe accessories		
Accessory Set for R&S®RTM-ZP10 Passive Probe	R&S®RT-ZA1	1409.7566.02
Spare Accessory Set for R&S®RT-ZS10/R&S®RT-ZS10E	R&S®RT-ZA2	1416.0405.02
Pin Set for R&S®RT-ZS10/R&S®RT-ZS10E	R&S®RT-ZA3	1416.0411.02
Mini Clips	R&S®RT-ZA4	1416.0428.02
Micro Clips	R&S®RT-ZA5	1416.0434.02
Lead Set	R&S®RT-ZA6	1416.0440.02
Pin Set for R&S®RT-ZD20	R&S®RT-ZA7	1417.0609.02
Probe Power Supply	R&S®RT-ZA13	1409.7789.02
Accessories		
Front Cover	R&S®RTM-Z1	1305.0272.02
Soft Case for R&S®RTM oscilloscopes and accessories	R&S®RTM-Z3	1305.0289.02
Rackmount Kit	R&S®ZZA-RTM	1304.8292.02

Service options		
Extended Warranty, one year	R&S®WE1RTM	Please contact your local sales office.
Extended Warranty, two years	R&S®WE2RTM	
Extended Warranty, three years	R&S®WE3RTM	
Extended Warranty, four years	R&S®WE4RTM	
Extended Warranty with Calibration Coverage, one year	R&S®CW1RTM	
Extended Warranty with Calibration Coverage, two years	R&S®CW2RTM	
Extended Warranty with Calibration Coverage, three years	R&S®CW3RTM	
Extended Warranty with Calibration Coverage, four years	R&S®CW4RTM	

Архангельск (8182)63-90-72
 Астана (7172)727-132
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06

Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16

Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47

Россия (495)268-04-70

Казахстан (772)734-952-31