

Всенаправленная антенна HE314A1



Диапазон 20 - 500 МГц

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

<https://rohdeschwarz.nt-rt.ru> || rwz@nt-rt.ru

R&S®HE314A1

ACTIVE

OMNIDIRECTIONAL

ANTENNA

20 MHz to 500 MHz

Active omnidirectional reception of horizontally polarized waves



The R&S®HE314A1 is a turnstile antenna consisting of two active receiving dipoles connected via a 90° hybrid coupler.


The antenna is used for the reception of horizontally polarized signals; the horizontal radiation pattern is optimized for omnidirectional reception.

The R&S®HE314A1 can be extended for omnidirectional reception of vertically polarized waves by using, for example, an R&S®HE309E active vertical dipole mounted at the top.

Key facts


- ▶ High sensitivity
- ▶ Wide frequency range
- ▶ Omnidirectional reception of horizontally polarized waves
- ▶ Small size
- ▶ Ideal for mobile or semi-mobile receiving systems






Specifications		
Frequency range		20 MHz to 500 MHz
Polarization		
	at horizon	linear horizontal
	at 90° elevation	right-hand circular
Input impedance		50 Ω
VSWR		< 2.5
Realized gain		-14 dB to +5 dB
Antenna factor		2 dB (1/m) to 20 dB (1/m) (see diagram)
Field strength sensitivity ($\Delta f = 1$ Hz; S/N: 0 dB)	20 MHz	-42 dB(μ V/m)
	500 MHz	-33 dB(μ V/m)
IP2		> 60 dBm
IP3		> 30 dBm
Power supply		18 V to 30 V DC (typ. 340 mA)
Connector		N female
MTBF		> 25000 h
Operating temperature range		-40°C to +70°C
Max. wind speed	without ice deposit	180 km/h
Dimensions	W x H x L	approx. 1 m x 0.33 m x 1 m (39 in x 13 in x 39 in)
Weight		approx. 8 kg (18 lb)

Typical realized gain

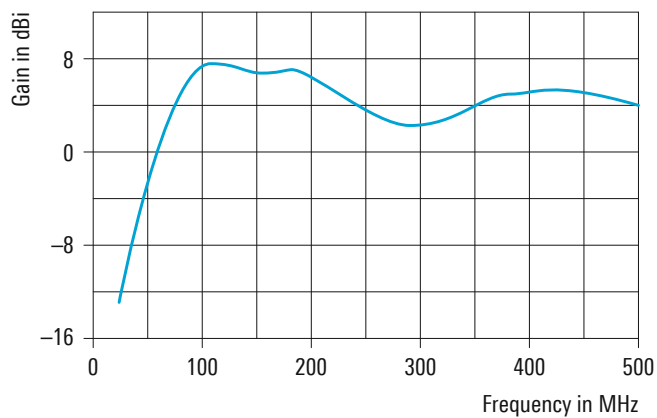

Typical antenna factor

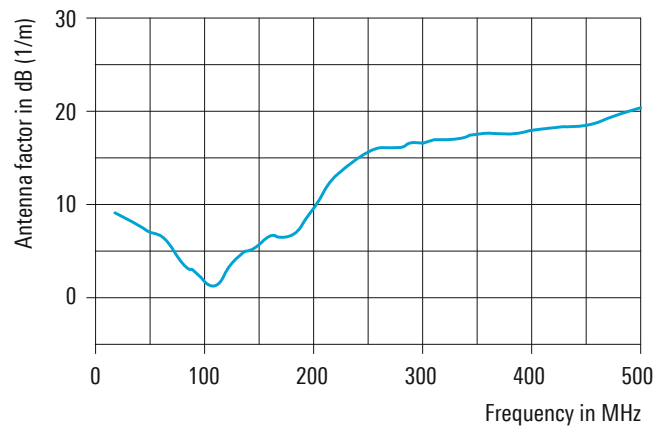

Ordering information	Type	Order No.
Active omnidirectional antenna	R&S®HE314A1	4027.6505.02
Recommended extras		
Bias unit	R&S®IN600	4094.3004.xx
Active vertical dipole	R&S®HE309E	4098.0000.02



Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93