

Активная антенна HE500



Диапазон 20 МГц - 3 ГГц

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

<https://rohdeschwarz.nt-rt.ru> || rwz@nt-rt.ru

R&S®HE500 ACTIVE RECEIVING ANTENNA

20 MHz to 3 GHz

Good reception results in a compact size




The R&S®HE500 active receiving antenna has been designed as a monitoring antenna for vertical polarization and omnidirectional reception in the frequency range from 20 MHz to 3 GHz.


The antenna features a compact design and low weight, making it ideal for use in mobile systems and environments where space is at a premium.

A sturdy, composite radome protects the antenna and its electronics against the effects of weather and high wind speeds.

Key facts

- ▶ Extremely broadband
- ▶ Omnidirectional radiation pattern
- ▶ Low weight
- ▶ Compact size
- ▶ Weatherproof housing

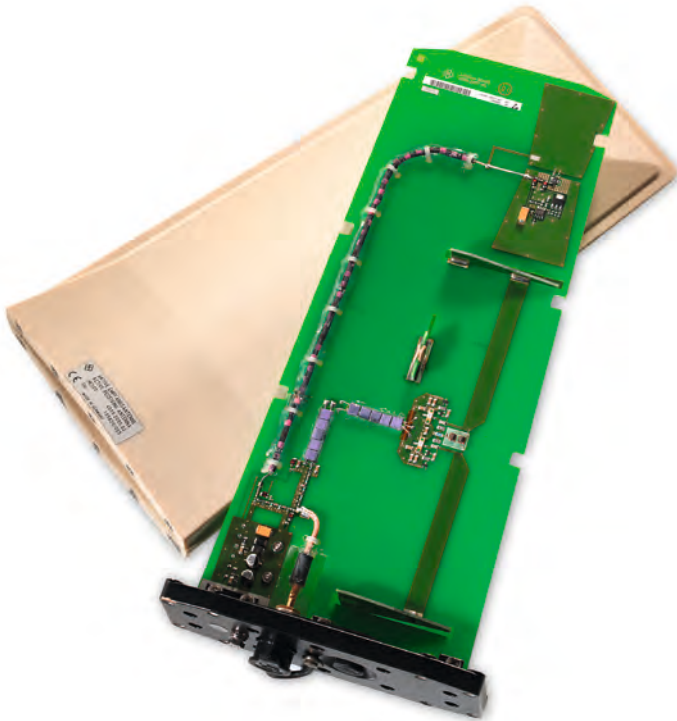


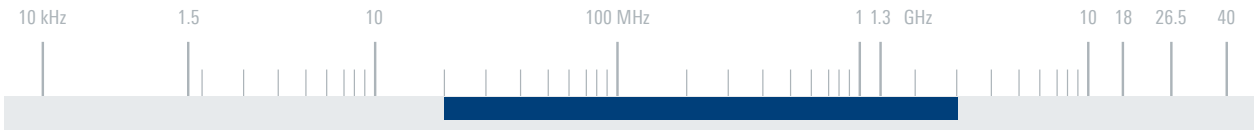


Specifications

Frequency range	20 MHz to 3 GHz	
Polarization	linear/vertical	
Input impedance	50 Ω	
VSWR	typ. < 3	
Horizontal radiation pattern	omnidirectional	
Antenna factor	see diagram	
Field strength sensitivity (S/N = 0 dB, Δf = 1 Hz)	20 MHz to 1.3 GHz	typ. -23 dB(μV/m)
	1.3 GHz to 3 GHz	typ. -20 dB(μV/m)
Destructive field strength	typ. > 50 V/m	
IP2	20 MHz to 900 MHz	typ. > 50 dBm
	> 900 MHz to 3 GHz	typ. > 30 dBm
IP3	typ. > 25 dBm	
Power supply	18 V to 32 V DC (max. 180 mA)	
Connector	N female	
MTBF	> 50000 h	
Operating temperature range	-40°C to +65°C	
Max. wind speed	model .02	250 km/h
	model .14	600 km/h (only on narrow side)
Dimensions	W × H × L	approx. 65 mm × 365 mm × 170 mm (3 in × 14 in × 7 in)
Weight	approx. 1.2 kg (3 lb)	

Typical antenna factor

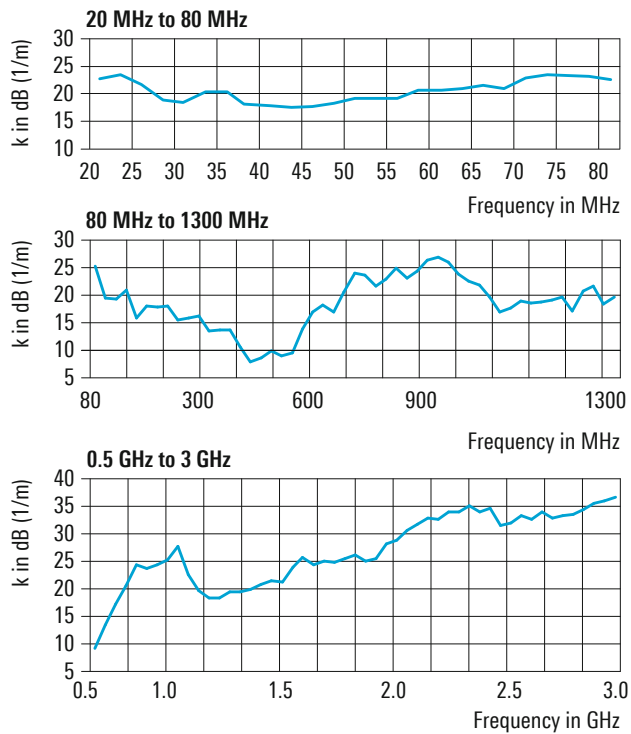

Typical VSWR characteristic

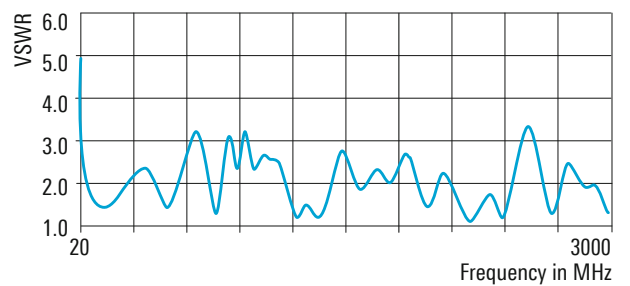

Ordering information	Type	Order No.
Active receiving antenna	R&S®HE500	4059.2005.02
Active receiving antenna, for use on aircraft	R&S®HE500	4059.2005.14
Recommended extra		
Bias unit	R&S®IN600	4094.3004.xx



Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93