

Дипольная антенна НК014Е



Диапазон 100 МГц - 2 ГГц

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

R&S®HK014E

VHF/UHF

COAXIAL DIPOLE

100 MHz to 2 GHz

VHF/UHF omnidirectional antenna for vertical polarization



The R&S®HK014E VHF/UHF coaxial dipole is a vertically polarized, omnidirectional antenna for fixed and mobile applications, particularly for use on board ships. It is suitable for both transmission and reception.

A mast stub mounted on the dipole's base plate provides a convenient antenna interface for customer applications.


The entire antenna system is splash water resistant.

The antenna can also be fitted upside down, if required.

Key facts

- ▶ Extremely wide frequency range
- ▶ High suppression of skin currents
- ▶ Filled-in vertical radiation pattern
- ▶ High protection against lightning strikes in the vicinity
- ▶ Sturdy design
- ▶ RCS optimized
- ▶ Minimal wind load
- ▶ Particularly for use on ships




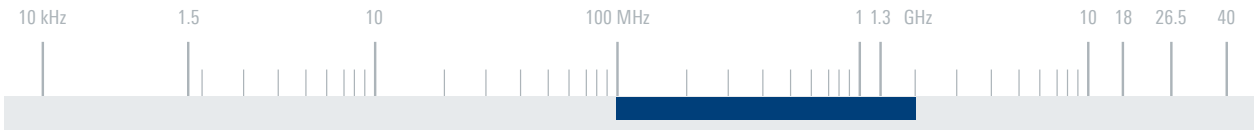


Specifications

Frequency range	100 MHz to 2 GHz	
Polarization	linear/vertical	
Input impedance	50 Ω	
VSWR	< 2	
Permissible input power	up to 200 MHz	1000 W CW
	up to 500 MHz	600 W CW
	up to 1.3 GHz	400 W CW
	up to 2 GHz	300 W CW
Gain	typ. 2 dBi	
Horizontal radiation pattern	omnidirectional	
Uncircularity	±1 dB	
Connector	N female	
MTBF	> 100 000 h	
Operating temperature range	-40°C to +70°C	
Protection class	IP65	
Max. wind speed	without ice deposit	275 km/h
Dimensions	∅ × H	approx. 0.5 m × 1.4 m (2 ft × 5 ft)
Weight	approx. 15 kg (33 lb)	

Typical VSWR

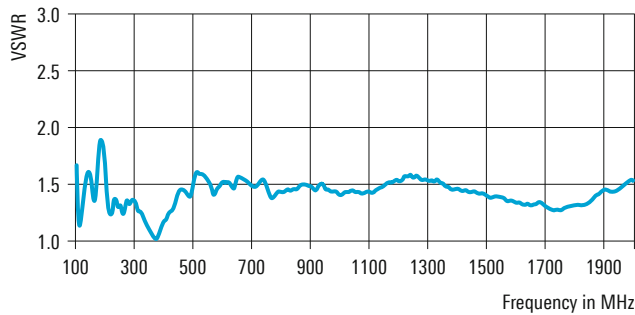

Typical vertical radiation patterns

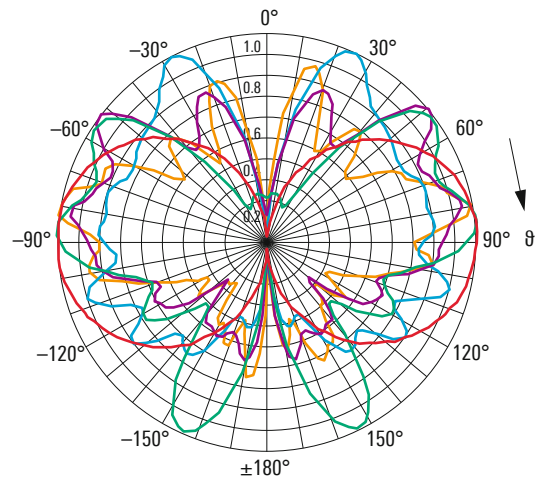

f = 100 MHz f = 500 MHz f = 1000 MHz
 f = 150 MHz f = 2000 MHz

Ordering information	Type	Order No.
VHF/UHF coaxial dipole, color: squirrel gray (RAL 7000)	R&S®HK014E	4095.5000.02
Recommended extra		
Diplexer for the ranges 100 MHz to 174 MHz/ 225 MHz to 450 MHz	R&S®FT224	0525.5117.04



Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93