

Широкополосная антенна НК060



Диапазон 30 - 513 МГц

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

<https://rohdeschwarz.nt-rt.ru> || rwz@nt-rt.ru

R&S®HK060 BROADBAND MANPACK ANTENNA

30 MHz to 513 MHz

Reliable communications in VHF and UHF frequency bands for manpack radios



The R&S®HK060 broadband manpack antenna is a vertically polarized omnidirectional receive and transmit antenna specially designed for portable radios. Its extremely broad frequency range from 30 MHz to 513 MHz makes it the ideal antenna for multiband, multirole radios (MMR).


The R&S®HK060 is equipped with a highly flexible bending mechanism allowing the antenna to be bent in almost every direction, e.g.:

- ▶ If you pass underneath low overhangs, it bends back and reerects itself automatically
- ▶ If you bend the antenna twice by 180°, the length of the antenna can be reduced to approx. 60 cm for transportation

Key facts


- ▶ Extremely broad frequency range
- ▶ Good form factor
- ▶ Very good radiation characteristics
- ▶ Optimized impedance matching
- ▶ Sturdy construction
- ▶ Foldable for transportation
- ▶ Designed to bend and reerect itself



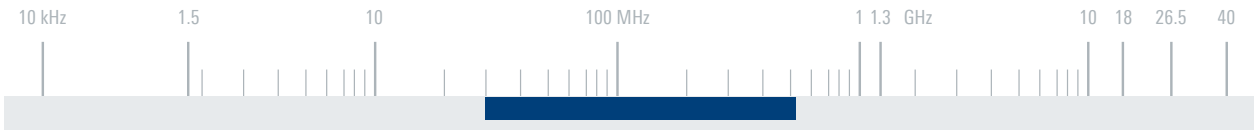


Specifications		
Frequency range		30 MHz to 513 MHz
Input impedance		50 Ω
RF connectors		N male (others on request)
VSWR		typ. < 3
30 MHz to 88 MHz		< 3.5
88 MHz to 175 MHz		< 6.0
175 MHz to 513 MHz		< 3.0
Gain	30 MHz to 88 MHz	typ. -2 dBi
	200 MHz to 513 MHz	typ. 0 dBi
Polarization		linear vertical
Radiation pattern		horizontal: omnidirectional
Maximum input power	30 MHz to 88 MHz	20 W CW
	88 Hz to 400 MHz	15 W CW
	> 400 MHz	10 W CW
MTBF		> 100000 h
Operating temperature range		-40°C to +71°C
Storage temperature range		-50°C to +80°C
Protection class		IP67
Dimensions (∅ × L)	unbent	approx. 35 mm × 1350 mm (1 in × 53 in)
	bent for transportation	approx. 35 mm × 600 mm (1 in × 24 in)
Weight		approx. 0.7 kg (2 lb)

Typical VSWR

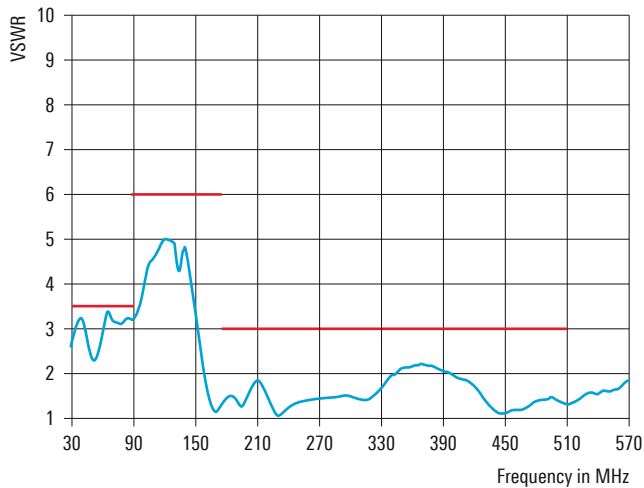

Typical gain

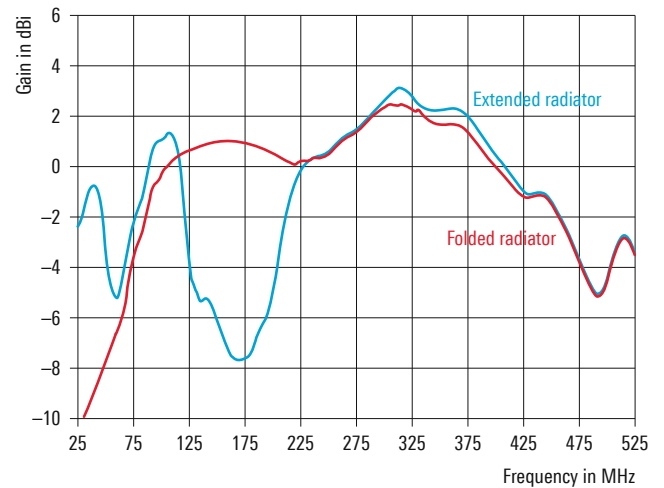

Ordering information	Type	Order No.
Broadband manpack antenna, color: black	R&S®HK060	4075.7008.03



Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93