

Логопериодическая антенна HL050E



Диапазон 750 МГц - 6 ГГц

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

<https://rohdeschwarz.nt-rt.ru> || rwz@nt-rt.ru

R&S®HL050E LOG-PERIODIC ANTENNA

750 MHz to 6 GHz

For EMI and EMS measurements



The linearly polarized R&S®HL050E log-periodic antenna provides broadband transmission and reception in the frequency range from 750 MHz to 6 GHz.

Precise construction makes the antenna suitable for field strength and EMI measurements.


Outstanding power rating and matching (VSWR) allow its use in EMS applications where field strengths of 10 V/m or higher are required.

The compact size and the low weight of this antenna ensure easy handling and make it ideal for use in test chambers and for open-field applications.

Key facts

- ▶ Wide frequency range
- ▶ Suitable for radiated emission measurements and immunity testing
- ▶ Stable radiation patterns over frequency range ensure optimum illumination of EUT
- ▶ Very low cross-polarization
- ▶ Compact size, low weight
- ▶ Ease of handling
- ▶ Outstanding power rating up to 6 GHz




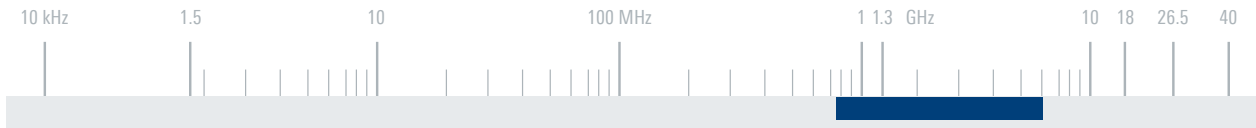


Specifications

Frequency range	750 MHz to 6 GHz	
Polarization	linear	
Nominal impedance	50 Ω	
VSWR	750 MHz to 1300 MHz	< 2.5
	above 1300 MHz	< 2
Gain	typ. 8.5 dBi	
Cross-polarization	< -20 dB	
Front-to-back-ratio	750 MHz to 1 GHz	> 15 dB
	1 GHz to 6 GHz	> 20 dB
Maximum input power	100 W CW	
RF connector	N female	
MTBF	> 100 000 h	
Operating temperature range	-30°C to +55°C	
Protection class	IP55	
Dimensions	$\varnothing \times H$	approx. 0.21 m \times 0.47 m (8 in \times 19 in)
Weight	approx. 1.4 kg (3 lb)	

Typical VSWR

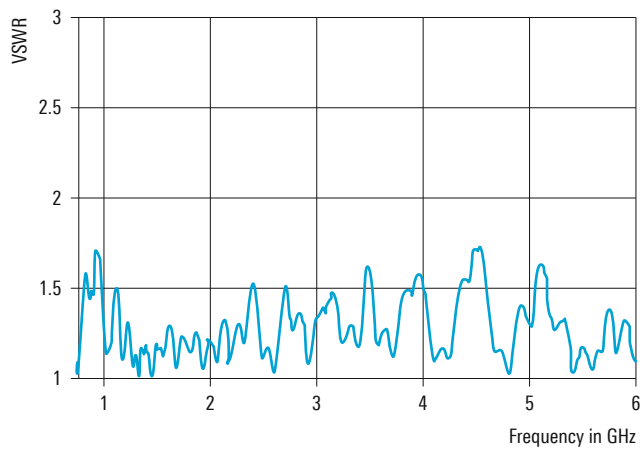

Typical antenna factor

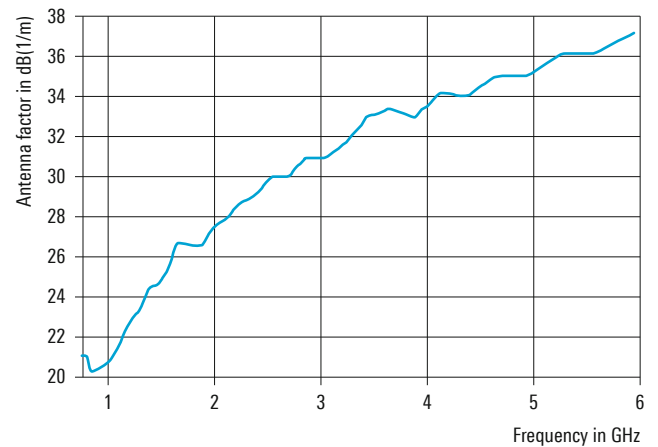

Ordering information	Type	Order No.
Log-periodic antenna	R&S®HL050E	4100.1003.02
Recommended extras		
Wooden tripod	R&S®HZ-1	0837.2310.02
Adapter for R&S®HZ-1	R&S®KM011Z10	4100.1703.02



Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06

Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93